




Product / Article			
Type	Design 1	Design 2	
CO4-125	B681	-	
-			



Bottom fitting

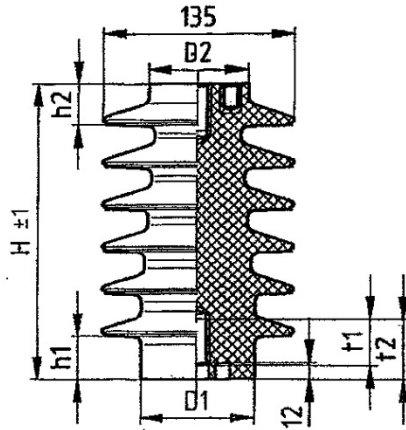

Top fitting



Design 1

Mechanical values Colour : RAL 8016

<b>CO4-125</b>	<b>210</b>	<b>31</b>	<b>29</b>	<b>80</b>	<b>70</b>	<b>M16x33</b>	<b>M12x18</b>	<b>M6x16</b>	<b>37</b>	<b>36</b>	<b>33</b>	<b>43</b>	
Type	H	h1	h2	D1	D2	d1xt	d2xt	d3xt	a1	a2	t1	t2	
Dimensions (in mm)													

**Tests corresponding IEC 60660 (VDE 0441/part 3) – VDE 0446/part1**

<b>CO4-125</b>	<b>FSH4-125/sc</b>	<b>H4-125</b>	<b>125 kV</b>	<b>50 kV</b>	<b>&gt; 4 kN</b>	<b>514 mm</b>	<b>6</b>	<b>2,92 kg</b>
Type	draw	Designation corresponding IEC 60273	Lightning impulse withstand voltage	Power frequency withstand voltage, wet	Failing load bending	Creepage distance	Numbers of ribs	Weight

Index	Modification / Complement	Date	Name	Appr	Index	Modification / Complement	Date	Name	Appr
a	Product nr	13.10.04	JB		d				
b	-				e				
c	Report and tolerance supplemented	26.01.05			f				

	Date	Name	Customer	Article	Drawing N° : FSH12/24/SC
Prepared	210995	JB	BINAME	-	<b>BINAME INSULATORS</b>
Approved	18.7.04		Material : Cyclo		
Scale : 1:1	Type :				BINAME INSULATORS Robert Dansaertlaan 250 1702 Groot-Bijgaarden Belgium
General tolerances DIN 16901 130	Casting cycloaliphatic resin outdoor post insulator Nominal Use Voltage 24 kV				